



Dongguan Large Electronics Co.,Ltd

东莞市钜大电子有限公司

NI-MH SC1500mAh 9.6V

NI-MH Battery Technology Specification

镍氢电池产品技术规格书

Customer confirmation 客户确认	Checked 签 名	
	Approved 批 准	
	Corporate name 公司名称:	
	Corporate seal 公司印章:	

Signed 签 发: _____

Drafted 编 制: **Tuo Xian De** 陀先德

Approved 批 准: **Huang Jian Hua** 黄建华

Document No.文件编号: **QA.U.1260** Edit 版别: **A**

东莞市钜大电子有限公司 Dongguan Large Electronics Co.,Ltd

东莞市南城区白马工业区黄金二路北 Baima Huangjin 2Road Southern District,Dongguan

电话 (Tel): +86-769-22810105

传真 (Fax): +86-769-22802559

深圳营销中心 Shenzhen Sale's Centr

深圳市宝安区宝民一路宝通大厦 1504 室 Room 1504,Lubaotong House,1Baomin Road,Baoan Industrial District ,ShenZhen.P.R.C

电话 (Tel): +86-755-27820569

传真 (Fax): +86-755-27820581

邮箱: dgmarket@large-battery.com

网址: <http://www.large-battery.com>

(If manufacturer want to modify the product technology specification, we won't inform you additionally)

(本公司保留对本产品技术规格如有更改不另行通知的权利)

LARGE BATTERY	Document 名称	SC1500 9.6V Technical Specification SC1500 9.6V 技术规格书	Page 页次	1/5
			Edition 版本	A
钜大电池	Number 编号	QA.U.1260	Valid Date 生效日期	2010-6-29
			Drafted 编制	Tuo Xian De 陀先德
			Signed 批准	Huang Jian hua 黄建华

1. 范围 SCOPE

此种规格适用于LARGE各种镍氢圆柱形电池和电池组。

This specification governs the performance of the following LARGE Nickel-Metal Hydride Cylindrical Cell and its stack-up batteries.

型号: NI-MH SC1500mAh 9.6V

LARGE Model: NI-MH SC1500mAh 9.6V

规格书显示了电池的标称电压。电池组的标称电压等于单体电池的电压乘以单体电池的数目。

The data involving nominal voltage and the approximate weight of stake-up batteries shall be equal to the value of the unit cell multiplied by the number of unit cells in the battery.

单体电池的标称电压= 1.2V

Nominal voltage of unit cell = 1.2V

2. 规格 RATINGS

类型 Description	单位 Unit	说明 Specification	环境 Conditions
标称电压 Nominal Voltage	V	9.6	
标称容量 Nominal Capacity	mAh	1500	标准充电/放电 Standard Charge/discharge
最小容量 Minimum Capacity	mAh	1500	标准充电/放电 Standard Charge/discharge
标准充电 Standard Charge	mA	150 (0.1C)	Ta=0~45°C
	hour	14-16	
快速充电 Fast Charge	mA	1500 (1C)	-ΔV=80-120mV/组 -ΔV=80-120mV/pack 终止时间=110%充入容量 (仅供参考) Timercutoff=110%input capacity 断电温度=55°C Temp.cutoff=55°C Ta=10~45°C
	hour	1.2approx	
涓流充电 Trickle Charge	mA	75 ~ 100	Ta=0~45 °C
终止电压 Discharge Cut-off Voltage	V	8.0	
最大放电电流 Maximum Discharging Current	mA	15000 (10C)	Ta=20~45°C
贮存温度 Storage Temperature	°C	-20~35°C	

LARGE BATTERY	Document 名称	SC1500 9.6V Technical Specification SC1500 9.6V 技术规格书	Page 页次	2/5
			Edition 版本	A
钜大电池	Number 编号	QA.U.1260	Valid Date 生效日期	2010-6-29
			Drafted 编制	Tuo Xian De 陀先德
			Signed 批准	Huang Jian hua 黄建华

3. 性能 PERFORMANCE

测试电池的状态应为用户收到后不超过一个月的产品

Unless otherwise stated, tests should be done within one month of delivery under the following

conditions:

适用温度 Ambient Temperature: $T_a=20\pm 5^{\circ}\text{C}$

相对湿度 Relative Humidity: $65\pm 20\%$

标准充放电 Standard Charge/ Discharge Condition:

充电/Charge: $150\text{mA} (0.1\text{C}) \times 16\text{hrs}$

放电/Discharge: $300\text{mA} (0.2\text{C})$ to 8.0V/组pack

测试 Test	单位 Unit	说明 Specification	环境 Conditions	备注 Remarks
容量 Capacity	mAh	≥ 1500	标准充电/放电 Standard Charge/Discharge	允许达到三个循环 Up to 3 cycles are allowed
开路电压 Open Circuit Voltage (OCV)	V	≥ 10.0	充电后一小时内 Within 1hr after standard charge	
内阻 Internal Impedance (Ri)	m Ω	≤ 115	达到完全充电状态 Upon fully charge (1kHz) (1kHz)	
高倍率放电 High Rate Discharge (1C)	分 /min	≥ 54	标准充电后一小时内进行放 电 Standard Charge, 1hr rest before discharge	
过充 Overcharge	N/A	不漏不爆炸 No leakage nor explosion	150mA (0.1C) 充电48小时 150mA (0.1C) charge 48 hours	
容量保留 Charge Retention	mAh	$\geq 900 (60\%)$	0.1C 充电 16 小时后在 $20\pm 2^{\circ}\text{C}$ $^{\circ}\text{C}$ 贮存 28 天再用 0.2C 放电 到 8.0V/组 Charge: 0.1C for 16 hours Storage: 28days at $20\pm 2^{\circ}\text{C}$ Discharge: 0.2C to 8.0V/pack	
IEC 循环测试 IEC Cycles Test	周期 Cycle	≥ 500	IEC61951-2 (2003)	

LARGE BATTERY	Document 名称	SC1500 9.6V Technical Specification SC1500 9.6V 技术规格书	Page 页次	3/5
			Edition 版本	A
钜大电池	Number 编号	QA.U.1260	Valid Date 生效日期	2010-6-29
			Drafted 编制	Tuo Xian De 陀先德
			Signed 批准	Huang Jian hua 黄建华

测试 Test	单位 Unit	说明 Specification	环境 Conditions
泄漏 Leakage	N/A	不漏液，不变形 No leakage nor deformation.	以(0.1C)完全充满，搁置14天 Full charged at (0.1C) stand for 14 days
短路 Short Circuit	N/A	可能发生漏液、变形，但是不会发生爆炸。 Leakage & deformation may occur, but no explosion is allowed.	在标准充电后，短路1个小时(铜芯=0.75mm ² ×20毫米) After standard charge, short circuit for 1 hour(leading wire=0.75mm ² ×20mm)
震动 Vibration Resistance	N/A	每只电池电压变化应在0.02V之内,内阻应该在5 milli-ohm之内 Change of Voltage $\Delta V < 0.02V$, Change of internal impedance $\Delta Ri < 5 m\Omega$.	以0.1C给电池组充电16小时,然后再放置24小时。检测电池受振前后的状态。振幅为1.5mm 3000CPM 测试时间应不少于60分钟 Charge the battery 0.1C 16hrs, then leave for 24hrs. check battery before / after vibration. Amplitude:1.5mm Vibration:3000CPM Any direction for 60mins.
跌落 Impact Resistance	N/A	每只电池电压变化应在0.02V之内,内阻应该在5 milli-ohm之内 Change of voltage $\Delta V < 0.02V$, Change of internal Impedance $\Delta Ri < 5 m\Omega$.	以0.1C给电池组充电16小时,再放置24小时。检测电池跌落前后的状态 高度为50cm,木板厚度为30mm 测试次数应不少于3次,测试方向分为X, Y, Z三个方向。 Charge the battery 0.1C 16hrs, then leave for 24hrs. check battery before / after dropped, Height: 50cm, Wooden board(thickness 30mm)Direction not specified 3 times.

4. 结构,尺寸及标记 CONFIGURATION, DIMENSIONS AND MARKINGS

请查阅附上的图表。

Please refer to the attached drawing.

5. 外观 EXTERNAL APPEARANCE

电池/电池组在自由放置下，无破裂、划痕、生锈、变色、漏液及变形等现象。

The cell/ battery shall be free from cracks, scars, breakage, rust, Discoloration, leakage nor deformation.



LARGE BATTERY	Document 名称	SC1500 9.6V Technical Specification SC1500 9.6V 技术规格书	Page 页次	4/5
			Edition 版本	A
Valid Date 生效日期			2010-6-29	
钜大电池	Number 编号		QA.U.1260	Drafted 编制
			Signed 批准	Huang Jian hua 黄建华

6、警告 CAUTION

1. 不允许反极充电。Reverse charging is not acceptable
2. 电池在充电中不得负荷电流。Do not burthen current when charging.
3. 充放电不得超出说明书规定的范围。Do not charge/discharge with more than the specified current.
4. 切勿使电池短路，否则可能使其永久性损坏。Do not short circuit the cell/ battery. Permanent damage to the cell/ battery may result.
5. 请勿将电池投入火中或拆解。Do not incinerate or mutilate the cell/ battery.
6. 使用不当会导致电池的使用寿命的下降，如：极端高温、深循环、过充或过放。Do not subject batteries to adverse conditions like: extreme temperature, deep cycling and excessive Overcharge/overdischarge. The life expectancy may be reduced.
7. 电池不使用时应放在干燥通风的地方。大量贮存或装运前应对电池进行放电。Store the cell/ battery in a cool dry place. Always discharge the cell/battery before bulk storage or shipment.
8. 若要坚持贮存，为了维护电池性能，在半年内要对电池进行充放电一次，以防其失去功效。Cycle (charge and discharge) the battery every 6-9months to maintain cell/battery performance when being stored for an extended period of time.
9. 远离儿童，如不慎误吞请立即送往医院。Keep away from children. If swallowed, contact a physician at once.
10. 电池在塑料盒内要通风，因为内部或许有释放氧气和氢气的危险，导致因火源而引起爆炸。Avoid airtight battery compartments. Ventilation should be provided in the plastic case of batteries, otherwise oxygen and hydrogen gas generated inside can cause explosion when exposed to fire sources such as motors or switches.

备注/Remark:

IEC61951-2周期寿命测试IEC 61951-2(2003) Cycle Life Test:


周期Cycle	充电Charge	搁置Rest	放电Discharge
1	0.4C×3.5hrs	0	0.4C×1.25hrs
2-28	0.4C×1.75hrs	0	0.4C×1.25hrs
29	0.4C×1.75hrs	0	0.4Cto8.0V/pack
	0.2Cto8.0V/pack		
30	0.4C×3.5hrs	0.5-2.0hrs	0.2Cto8.0V/pack
循环1至30次可重复使用，直到任意放电30周期使用时间少于三小时则停止。Cycle 1 to 30 shall be repeated until the discharge duration on any 30 th cycle becomes less than 3 hrs.			



Dongguan Large Electronics Co., Ltd 东莞市钜大电子有限公司

LARGE BATTERY	Document 名称	SC1500 9.6V Technical Specification SC1500 9.6V 技术规格书	Page 页次	5/5
			Edition 版本	A
钜大电池	Number 编号	QA.U.1260	Valid Date 生效日期	2010-6-29
			Drafted 编制	Tuo Xian De 陀先德
			Signed 批准	Huang Jian hua 黄建华

产品尺寸示意图 Dimensions of the battery:

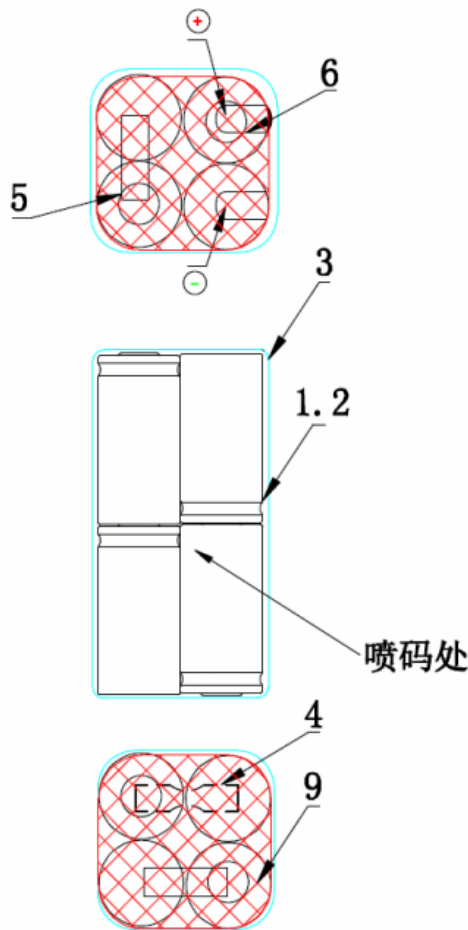

喷码内容:

Ni-MH
8XSC 1500mAh 9.6V

9	绝缘面垫	4.8V整块	2	红色
8	负极小标贴	□7	1	白底绿字
7	正极小标贴	□7	1	白底红字
6	正负极引出片	7X25X0.15mm	2	软态镀镍片
5	连接片	8.0X23X0.15	4	软态镀镍片
4	30A熔断片	6.5X25X0.125	1	软态镀镍片
3	电池外套	130	1	白色PVC
2	电池内套	35.7	8	SC空白纸套
1	电池型号	Ni-MH SC	8	1500mAh

.....END 结束.....